




200 SLIP-IN HEATER

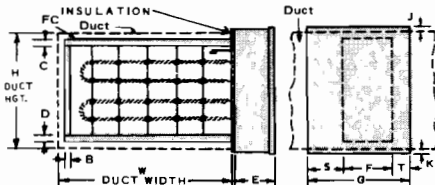


201 INSULATED TERMINAL BOX

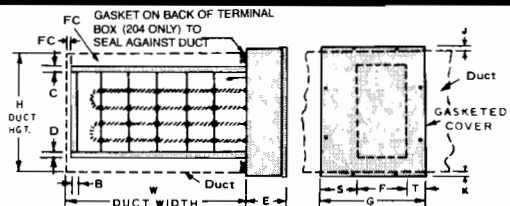


202 DUSTTIGHT TERMINAL BOX (UL) OR WEATHER RESISTANT TERMINAL BOX (NOT UL)

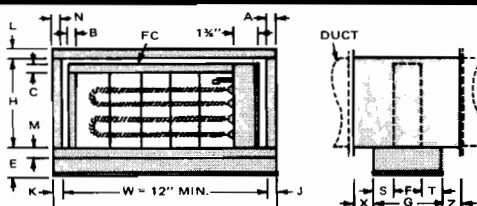


203 FLANGED HEATER WITH BOTTOM OUTLET CONSTRUCTION

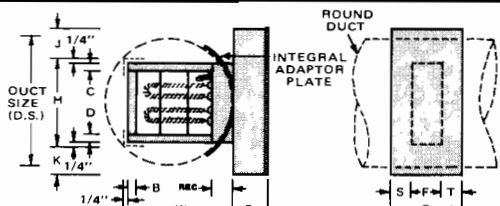


205 SLIP-IN HEATER FOR ROUND DUCTS

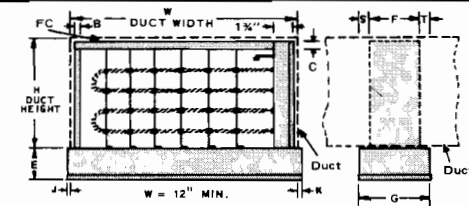


206 SLIP-IN HEATER WITH BOTTOM INSERT CONSTRUCTION

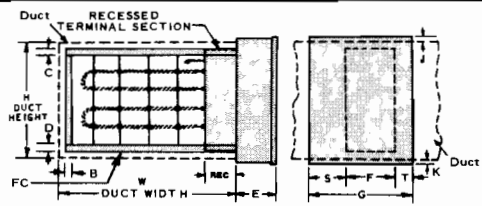


207 SLIP-IN HEATER WITH RECESSED TERMINAL BOX (SPECIFY REC DIMENSION)

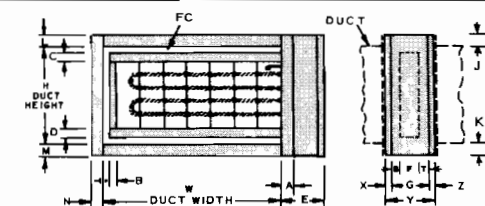


208 FLANGED HEATER

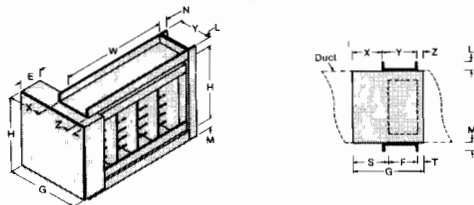


209D STANDARD FLANGED CONSTRUCTION (Indoor Use)

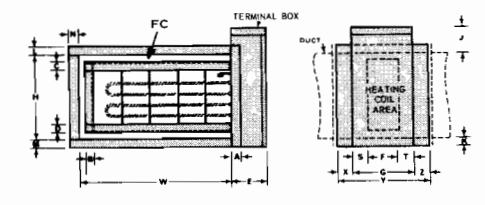


209C RAIN TIGHT FLANGED HEATER

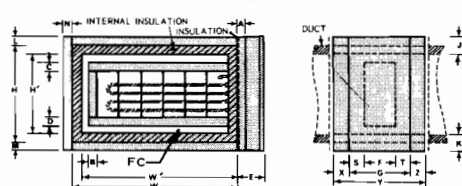


214 1" INTERNAL INSULATION ON ALL FOUR SIDES

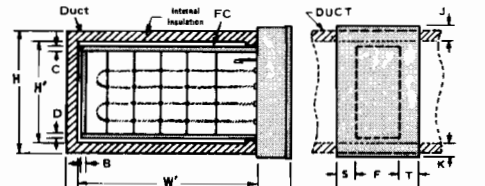

219. HEATER FOR INSULATED DUCT (1" or less)

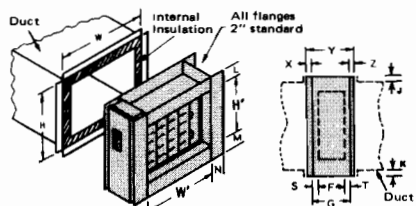

219/208 FLANGED HEATER FOR INSULATED DUCT

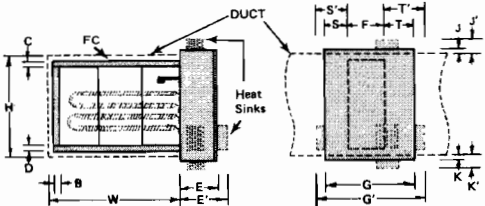

220 COMPONENTS MOUNTED ON OUTSIDE OF TERMINAL BOX

**STANDARD DIMENSIONS**  
 See Certified Print for Exceptions and Complete dimensions Printed in U.S.A.

T = 1" Std.  
 B = 1/2" Std.  
 X = Z = 1/2" Std.  
 FC = 1/4" except on 202C, 204A and 204C where FC = 3/4"

L = M = N = A = 1" Std.  
 (2" if W > 48" or H > 36")