

Series

# OTH2750


### Non Programmable Electronic Thermostat



CSA-C828-06 Performance Standard

## Features

Type	- Non programmable electronic proportional pulsing line voltage thermostat.
Color	- Standard: white.
Alimentation	- 120/208/240V, 50/60 Hz.
Power	- Maximum load: 11.5A at 120/208/240V. - Minimum load: 1.25A at 120/208/240V.
Control	- 10-minute or 15-second cycle. - Resolution: $\pm 0.5$ °C (1 °F). - Precision: $\pm 0.15$ °C (0.27 °F) on 15-second cycle. - Precision: $\pm 0.5$ °C (0.1 °F) on 10-minute cycle.
Temperature range	- 5 °C (41 °F) to 30 °C (86 °F).
Display	- Digital screen with white LED backlit. - Display ambient temperature and heating level indicator (in continuous), setpoint temperature setting (on demand), fan-forced heater mode and keypad lock (when activated).
Other features	- Choice of temperature display format (°C or °F). - Temperature setpoints recorded permanently in case of a power outage. - Ability to set minimum and maximum setpoints. - Night light mode for the display LED.
Installation	- 2-wire thermostat, easy to install.
Application	- Baseboard heater, radiant ceiling, radiant floor (without floor sensor), convector (short cycle) and fan-forced convector (long cycle).
Warranty	- <b>3-year warranty against defects.</b>

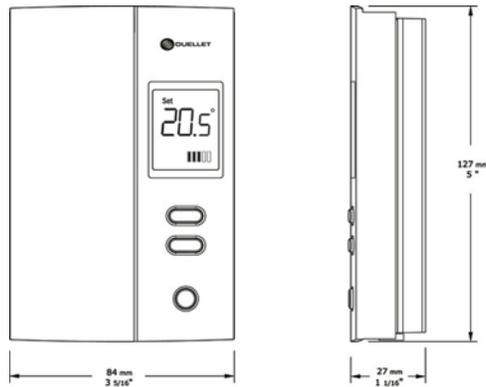

### Model

Product #	Description	Volts	Watts	Qty
OTH2750	Non programmable electronic proportional pulsing line thermostat	120/208/240	1380/2390/2750	

Standard color is white.

### Specifications may change without prior notice

Project:	Approval Information
Consultant Engineer:	
Electrician Contractor:	
Distributor:	
Date:	
Contact in Brasch:	
Comments:	