

Series

OTH4000


Non Programmable Electronic Thermostat



CSA-C828-06 Performance Standard

Features

Type	- Non programmable electronic proportional pulsing line voltage thermostat.
Color	- Standard: white.
Voltage	- 120/208/240V, 50/60 Hz.
Rating	- Maximum load: 16.7A at 120/208/240V. - Minimum load: 1.25A at 120/208/240V.
Control	- 10-minute cycle (fan-forced convector) or 15-second cycle (convector). - Resolution: 0.5 °C (1 °F). - Precision: ± 0.15 °C (0.27 °F) on 15-second cycle. - Precision: ± 0.5 °C (0.1 °F) on 10-minute cycle.
Temperature range	- 5 °C (41 °F) to 30 °C (86 °F).
Display	- Digital screen with white LED backlit. - Display fan-forced heater mode and keypad lock (when activated). - Choice of temperature display format (°C or °F).
Other feature	- Temperature setpoints recorded permanently in case of a power outage. - Ability to set minimum and maximum setpoints. - Night light mode for the display LED.
Installation	- 2-wire thermostat, easy to install.
Application	- Baseboard heater, radiant ceiling, convector and fan-forced convector.
Warranty	- 3-year warranty against defects.

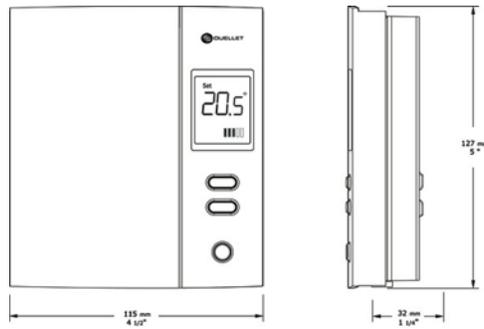

Model

Product #	Description	Volts	Watts	Qty
OTH4000	Non programmable electronic proportional pulsing line thermostat	120/208/240	2000/3465/4000	

Standard color is white.

Specifications may change without prior notice

Project:	Approval Information
Consultant Engineer:	
Electrician Contractor:	
Distributor:	
Date:	
Contact in Brasch:	
Comments:	